
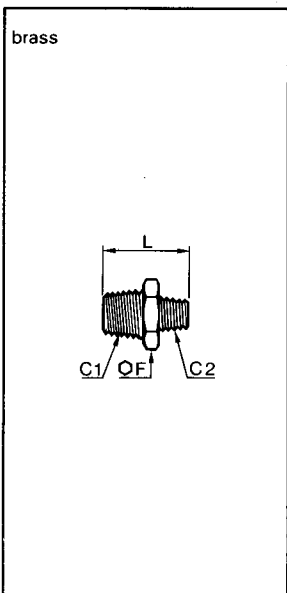




adaptors and manifold block

0121 straight male BSP taper unequal adaptor

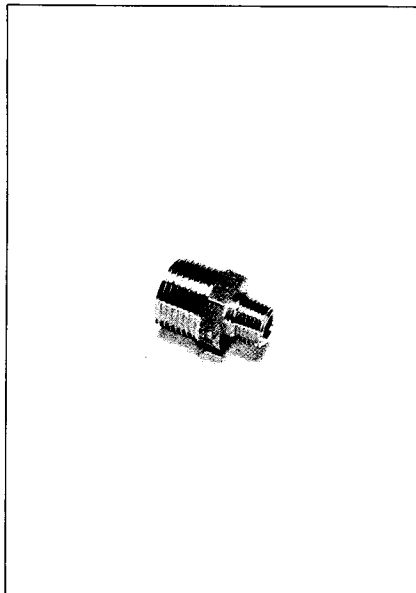



C1	C2		F	L	Δ kg
1/8	1/8	0121 10 10	11	19	0,009
1/4	1/4	0121 13 13	14	27	0,021
1/4	1/8	0121 13 10	14	23,5	0,021
3/8	3/8	0121 17 17	17	28	0,025
3/8	1/4	0121 17 13	17	27,5	0,024
3/8	1/8	0121 17 10	17	24	0,022
1/2	1/2	0121 21 21	22	36	0,053
1/2	3/8	0121 21 17	22	32,5	0,045
1/2	1/4	0121 21 13	22	32	0,045
1/2	1/8	0121 21 10	22	28,5	0,041
3/4	3/4	0121 27 27	27	40	0,092
3/4	1/2	0121 27 21	27	39	0,084
3/4	3/8	0121 27 17	27	35,5	0,076
3/4	1/4	0121 27 13	27	35	0,079
1"	1"	0121 34 34	36	46	0,156
1"	3/4	0121 34 27	36	43	0,143
1"	1/2	0121 34 21	36	42	0,133
1"	3/8	0121 34 17	36	38,5	0,126
1 1/4	1 1/4	0121 42 42	46	53	0,233
1 1/4	1"	0121 42 34	46	50,5	0,237
1 1/4	3/4	0121 42 27	46	47,5	0,229
1 1/4	1/2	0121 42 21	46	46,5	0,219

0121 straight male NPT to BSP taper adaptor

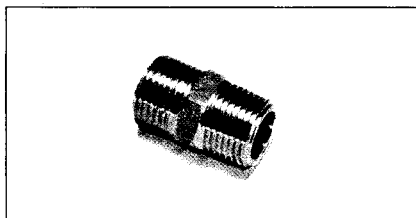



C		F	L	Δ kg
1/8	0121 11 10	11	19	0,009
1/4	0121 14 13	14	27	0,021
3/8	0121 18 17	17	28	0,025
1/2	0121 22 21	22	36	0,053
3/4	0121 28 27	27	40	0,090

0192 straight male adaptor, BSP taper to BSP parallel

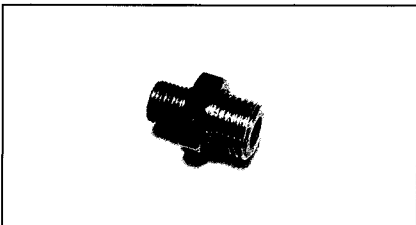

C1	C2		E	F	L	Δ kg
1/8	1/4	0192 10 13	9,5	17	23,5	0,019
1/4	1/4	0192 13 13	9,5	17	27,5	0,024
1/4	1/2	0192 13 21	27	7	31,5	0,067
3/8	1/4	0192 17 13	9,5	17	45	0,025
3/8	1/2	0192 17 21	27	7	31,5	0,061
1/2	1/2	0192 21 21	27	7	34	0,060

0135 manifold block

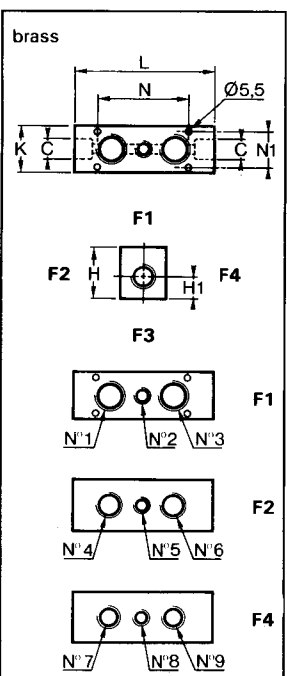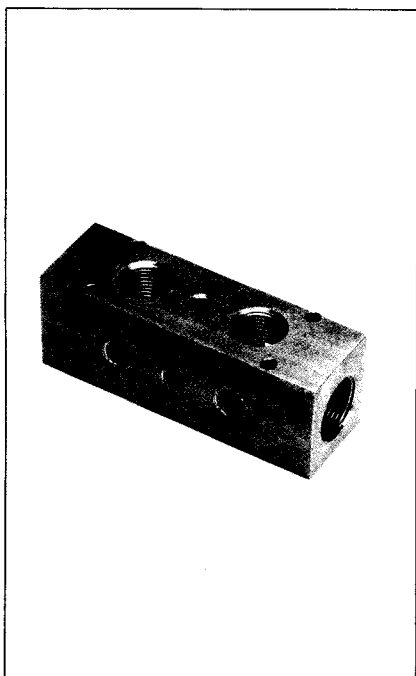

C		H	H1	K	L	N	N1	Δ kg
1/4	0135 06 13	30	13	25	70	37	17	0,334
1/4	0135 09 13	30	13	25	87	54	17	0,414
1/2	0135 06 21	40	16	35	86	45	27	0,722
1/2	0135 09 21	40	16	35	109	68	27	0,878
3/4	0135 10 27	45	21	40	122	78	32	1,212

This product is designed to distribute in several directions. The number of ports can be effectively increased by using tee pieces, cross pieces or double banjo couplings.

	F1			F2			F4					
	no. of ports	n°1	n°2	n°3	no. of ports	n°4	n°5	n°6	no. of ports	n°7	n°8	n°9
0135 06 13	1	1/4			2	1/8	1/8		2	1/8	1/8	
0135 09 13	2	1/4	1/4		3	1/8	1/8	1/8	3	1/8	1/8	1/8
0135 06 21	1	1/2			2	1/4	1/4		2	1/8	1/8	
0135 09 21	2	1/2	1/2		3	1/4	1/4	1/4	3	1/8	1/8	1/8
0135 10 27	3	1/2	1/8	1/2	3	3/8	1/8	3/8	3	1/4	1/8	1/4