
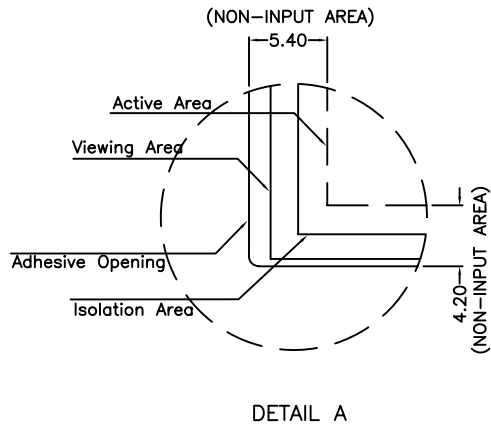


Pin#	Assignment
1	Bottom
2	Bottom sense
3	Top sense
4	Top
5	Left
6	Left sense
7	Right sense
8	Right

FRONT VIEW

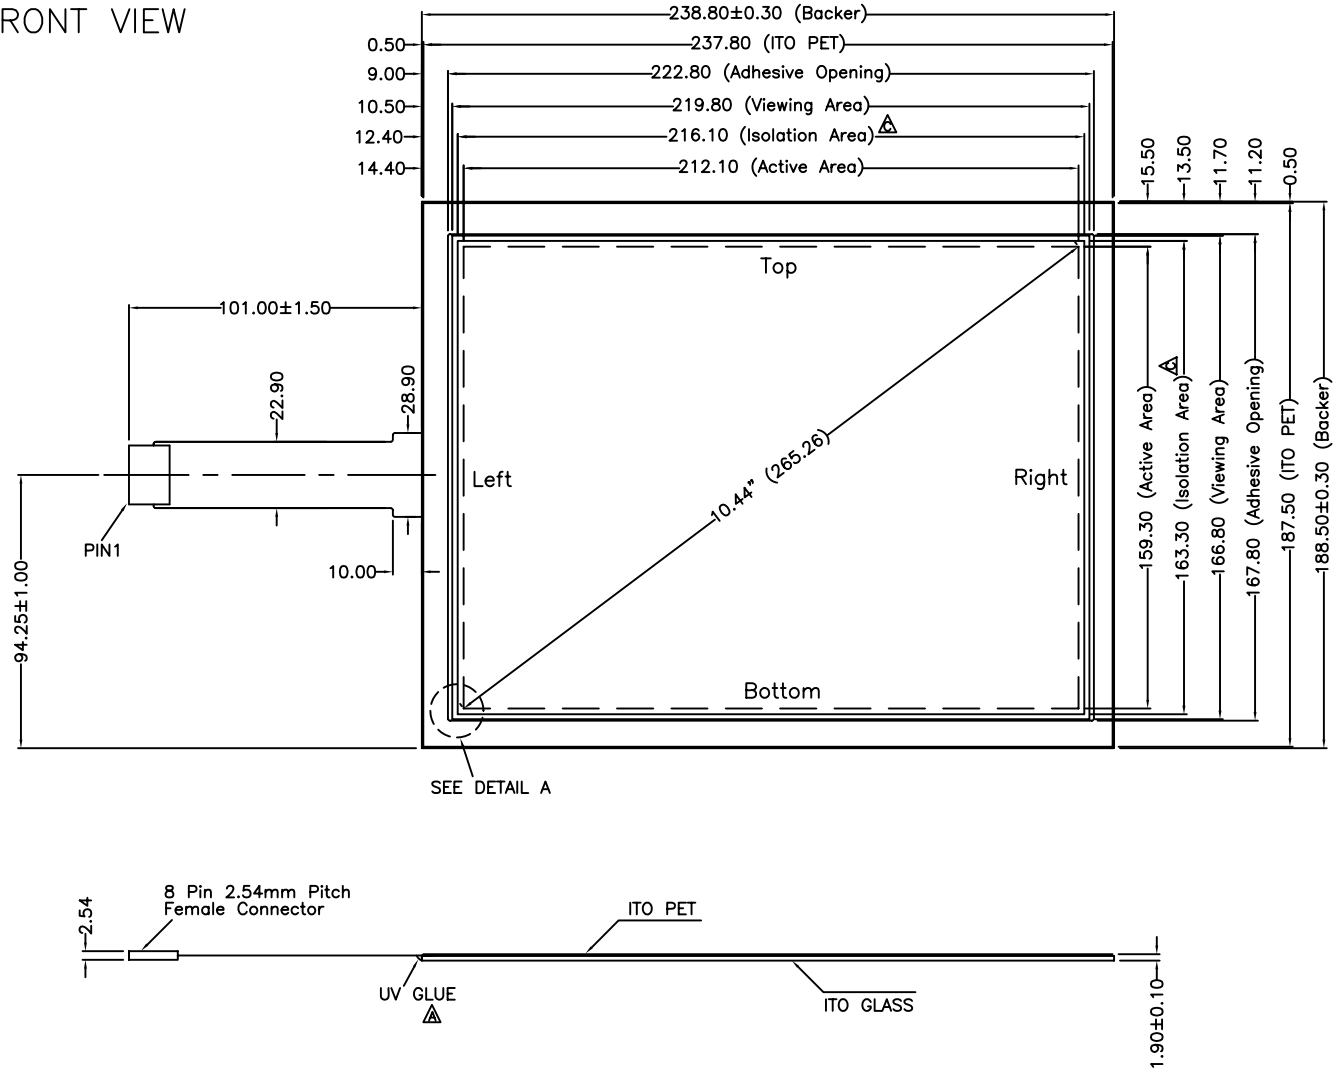

NOTES:

1. ITO GLASS THICKNESS : 1.60mm
2. OVERALL THICKNESS : 1.90±0.10mm
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : ANTI-GLARE HARDCOAT
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
7. OTHER SPEC : SEE APPROVAL SHEET



NO.	DATE	DESCRIPTION	CHK
C	AUG 28, 2006	INCREASE ISOLATION AREA	ALEX
B	JUNE 27, 2005	MODIFY CIRCUIT & TAIL TYPE	ALEX
A	SEP 29, 2004	ADD UV GLUE TO TAIL LOCATION	ALEX

REVISION			
CHEF OF DESIGN	APPROVED	Alex	
ENGINEER	PROJECT MANAGER		
DRAWN BY	Denise	DATE	OCT 11, 2007
SHT	1 OF 1	REV.	C

Apex Material Technology Corp.

TOLERANCES UNLESS SPECIFIED		MODEL NAME : 9518
.X	± 0.50	DWG NO : 9518-3-011
.XX	± 0.50	SCALE: 1:1 UNIT: mm
.XXX	± 0.30	
ANGULAR	.	