

# ADA-PLCC32-32

**Introduction:**


This adapter connect the pins of a PLCC32 device to a 28 or 32 pin DIP equivalent. It accept a PLCC32 device and plug into a DIP socket. Socket type "open".

**Connections of this adapter:**

DIP32	PLCC32	PLCC32	DIP32
1	1	32	32
2	2	31	31
3	3	30	30
4	4	29	29
5	5	28	28
6	6	27	27
7	7	26	26
8	8	25	25
9	9	24	24
10	10	23	23
11	11	22	22
12	12	21	21
13	13	20	20
14	14	19	19
15	15	18	18
16	16	17	17

DIP28	PLCC32	PLCC32	DIP28
X	1	32	28
1	2	31	27
2	3	30	26
3	4	29	25
4	5	28	24
5	6	27	23
6	7	26	X
7	8	25	22
8	9	24	21
9	10	23	20
10	11	22	19
X	12	21	18
11	13	20	17
12	14	19	16
13	15	18	15
14	16	17	X

**Dimensions of the devices accepted:**

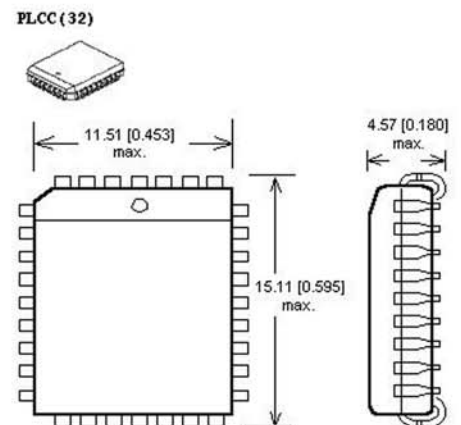

**Package PLCC32 :**



**Examples of supported devices:**

AMD : AM27C256  
ST : M27C1001 - M29F040B

**Equivalent adapters from other manufacturers:**

WL-PL32-U1  
PA32PL32D / PA32-32 / PA32-28  
SA015A1T / SA003 / SA002

**Item includes:**

Adapter.  
User manual in English and French.