


**DIP28 TO MLF28/QFN28 SOCKET ADAPTER
ACCEPT 6x6mm CMS package**

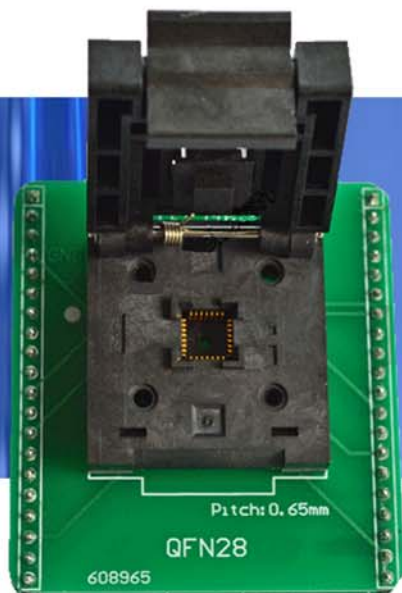

ADA-QFN28


Introduction:

This adapter connect the pins of a DFN28 or QFN28 package chip to a 28 pin DIP equivalent.
It accept a MLF/QFN device and plug into a DIP socket.
Socket type "cover".


Connections of this adapter:

| DIP28 | QFN28 | QFN28 | DIP28 |
|-------|-------|-------|-------|
| 1 | 26 | 25 | 28 |
| 2 | 27 | 24 | 27 |
| 3 | 28 | 23 | 26 |
| 4 | 1 | 22 | 25 |
| 5 | 2 | 21 | 24 |
| 6 | 3 | 20 | 23 |
| 7 | 4 | 19 | 22 |
| 8 | 5 | 18 | 21 |
| 9 | 6 | 17 | 20 |
| 10 | 7 | 16 | 19 |
| 11 | 8 | 15 | 18 |
| 12 | 9 | 14 | 17 |
| 13 | 10 | 13 | 16 |
| 14 | 11 | 12 | 15 |

Package MLF/QFN:



Dimensions of the devices accepted:

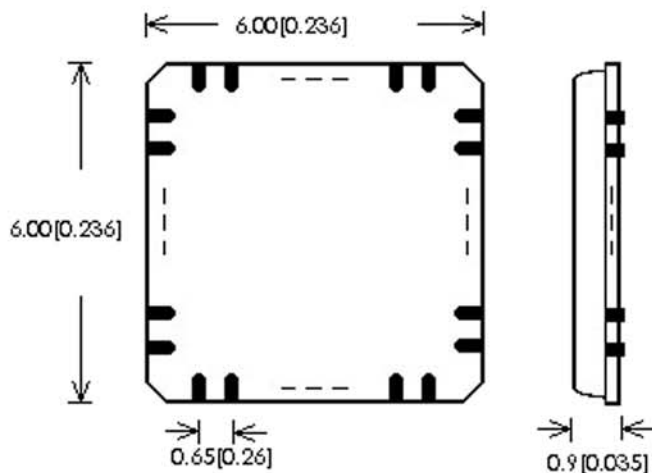

Examples of supported devices:

MICROCHIP : dsPIC30F1010, PIC18F25K22

Equivalent adapters from other manufacturers:

WL-QFN28-U203
PA28-QFN28D
SA0685

Item includes:

Adapter.
User manual in English and French.

Products informations : www.seeit.fr