




FTDI Chip

VI800A-232U Datasheet

**Plug in accessory for
VM800P**

**Embedded Video Engine
Plus module**

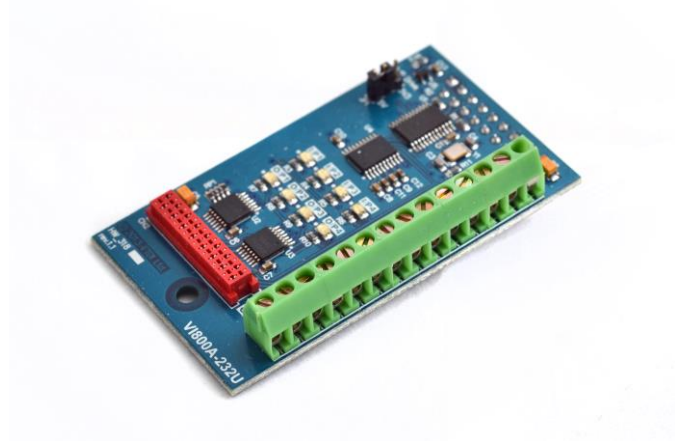

1 Introduction

The VI800A-232U is a plug in accessory for the VM800P module, which expands the VM800P IO capabilities to include RS232.

This module behaves as an SPI to RS232 bridge on the VM800P Plus module.

1.1 Features

- Connects to the VM800P Plus module using an SPI slave interface
- SPI slave interface is converted to RS232 interface
- 4 GPIO inputs and 4 GPIO outputs
- 8 LEDs to indicate the input and output status
- 5 V tolerant buffers
- Screw connector to connect the RS232 signals, GPIO inputs and GPIO outputs
- IO connector to connect the RS232 signals, GPIO inputs and GPIO outputs
- Powered from the VM800P module

2 Ordering Information

Part No.	Description
VI800A-232U	VI800A RS232 module, plug in accessory for the VM800P Plus module

Table 2-1 – Ordering information

Table of Contents

1	Introduction	1
1.1	Features.....	1
2	Ordering Information	2
3	Hardware Description.....	4
3.1	VI800A-232U module.....	4
3.2	Physical Descriptions	5
3.2.1	PCB Dimensions	5
3.2.2	VI800A-232U Connectors	6
3.2.3	VI800A-232U Components	8
4	Board Schematics	9
5	Hardware Setup Guide.....	10
5.1	Power Configuration	10
5.2	RS232 Interface connection.....	10
6	Contact Information	11
	Appendix A – References.....	12
	Appendix B - List of Figures and Tables.....	13
	Appendix C – Revision History.....	14

3 Hardware Description

Please refer to section **3.2.2** for connector settings. Some VI800A-232U jumpers must be set to work properly with your system.

3.1 VI800A-232U module



Figure 3-1 – VI800A-232U module

The VI800A-232U module is designed to connect directly with the VM800P Plus module.

The main functions of the VI800A-232U are as follows:

- Plug in accessory board for the VM800P Plus module.
- Interface to the VM800P Plus board as a SPI slave device.
- Connects with an external RS232 interface.
- Supports 4 GPIO inputs.
- Supports 4 GPIO outputs.
- Contains 8 LEDs, 4 represent input signal level and 4 represent output level.
- Powered by the VM800P Plus board.

3.2 Physical Descriptions

3.2.1 PCB Dimensions

The VI800A-232U module PCB layout is illustrated in [Figure 3-2](#), Figure 3-3 and Figure 3-4.

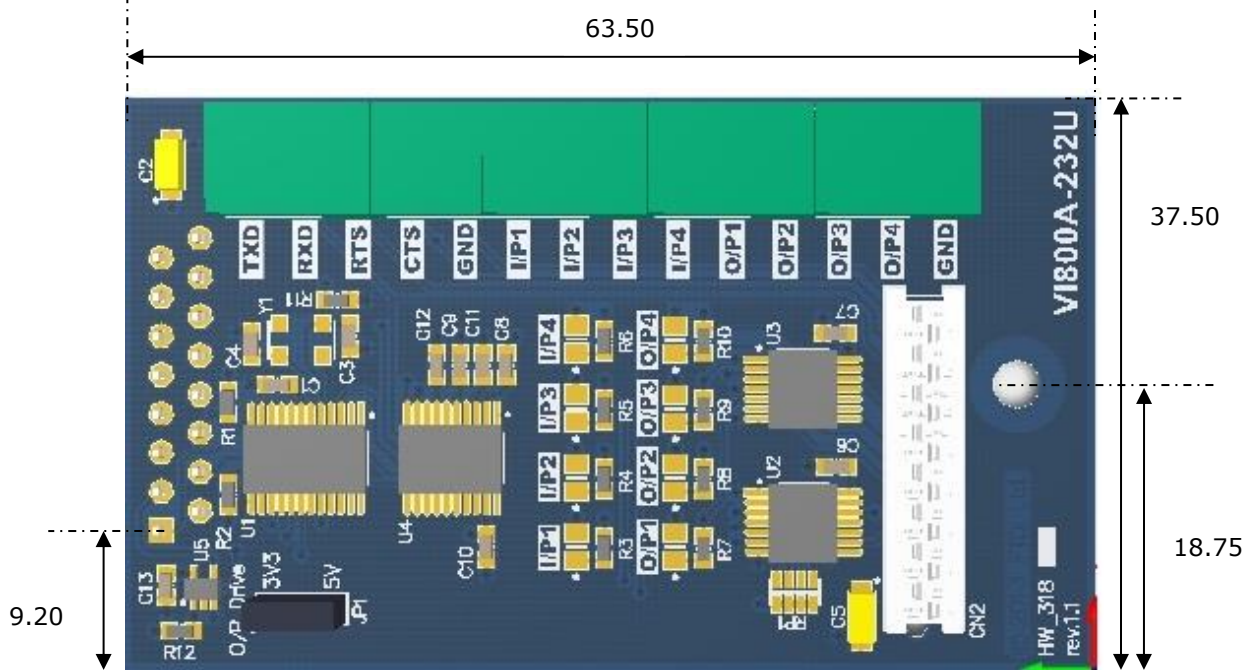


Figure 3-2 - VI800A-232U module PCB Top view

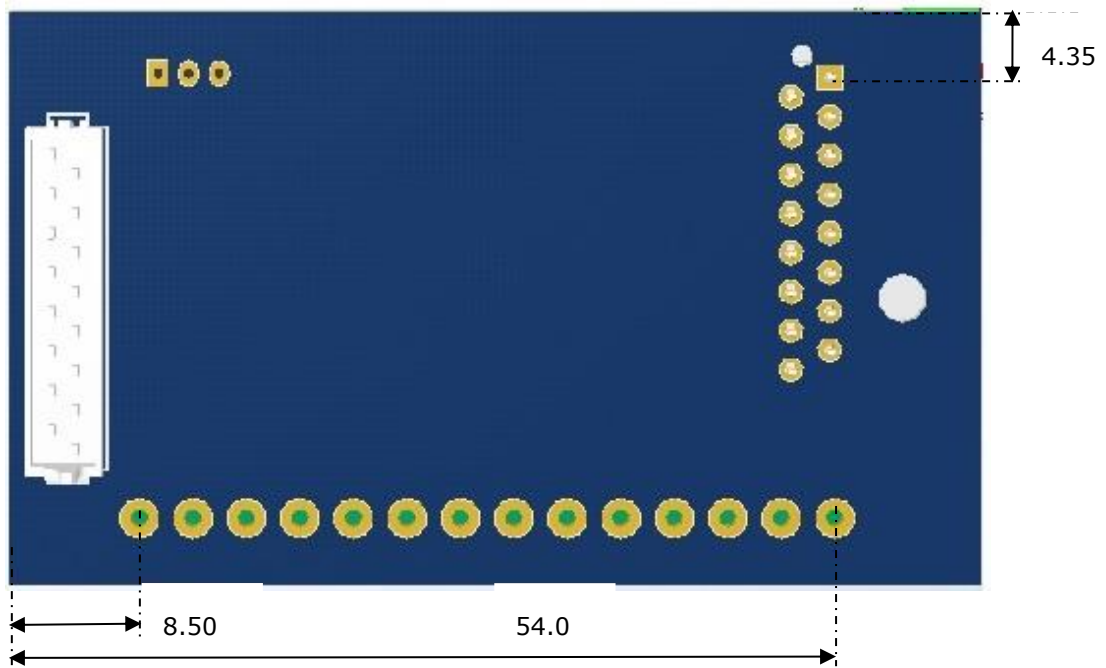


Figure 3-3 - VI800A-232U module PCB Bottom view



Figure 3-4 - VI800A-232U module PCB Side view

All dimensions are in mm

3.2.2 VI800A-232U Connectors

Connectors and jumpers are described in the following sections.

- **CN1- SPI Interface**

This is the interface where the SPI control and data signals are routed. There are also power and ground pins on this interface. This interface is used to connect the VI800A-232U board to the VM800P Plus board.

Note:

This connector should be connected to J6 of the VM800P plus board.

Pin No.	Name	Type	Description
1	SCLK	I	SPI Clock input, 3.3V (5V tolerant)
2	MOSI	I	Master Out Slave in, 3.3V (5V tolerant)
3	MISO	O	Master In Slave out, 5V
4	SS#	I	SPI Chip select, active low, 3.3V (5V tolerant)
5	INT0	O	Interrupt output active low, 3.3V
6	IO6	I	Daughter reset input, active low , 3.3V (5V tolerant)
7	AD4	IO	Address/Data Line 4
8	AD5	IO	Address/Data Line 5
9	3V3	P	3.3V power supply
10	5V	P	5V power supply
11	GND	P	Ground
12	RST#	I	Reset, active low
13	AD1	IO	Address/Data Line 1
14	NC	NA	Not Connected
15	AD3	IO	Address/Data Line 3
16	AD2	IO	Address/Data Line 2

Table 3-1 – CN1 Pinout

- **CN2- IO Interface (alternative to CN3)**

This is the interface where the RS232 connections, GPIO inputs and outputs are connected. There are also power and ground pins on this interface.

Pin No.	Name	Type	Description
1	3V3	P	3.3V power supply
2	5V	P	5V power supply
3	I/P1	I	Input 1
4	I/P2	I	Input 2
5	I/P3	I	Input 3
6	I/P4	I	Input 4
7	O/P1	O	Output 1
8	O/P2	O	Output 2
9	O/P3	O	Output 3
10	O/P4	O	Output 4
11	GND	P	Ground
12	GND	P	Ground
13	TXD_OUT	O	Transmit Data
14	RXD_IN	I	Receive Data
15	RTS_OUT	O	Request to send
16	CTS_IN	I	Clear to send

Table 3-2 – CN2 Pinout

- **CN3- External Screw Connector (alternative to CN2)**

This is the interface where the RS232 connections, GPIO input and outputs are connected. There are also power and ground pins on this interface.

Pin No.	Name	Type	Description
1	TXD_OUT	O	Transmit data
2	RXD_IN	I	Receive data
3	RTS_OUT	O	Request to send
4	CTS_IN	I	Clear to send
5	GND	P	Ground
6	I/P1	I	Input 1
7	I/P2	I	Input 2
8	I/P3	I	Input 3
9	I/P4	I	Input 4
10	O/P1	O	Output 1
11	O/P2	O	Output 2
12	O/P3	O	Output 3

Pin No.	Name	Type	Description
13	O/P4	O	Output 4
14	GND	P	Ground

Table 3-3 – CN3 Pinout

JP1- Output Drive Select

This jumper provides the option to select the power supply voltage for the inputs and outputs.

Jumper position	Description
Short pin 1-2	3.3V selected
Short pin 2-3	5V selected (default)

Table 3-4 – JP1 Pin options

3.2.3 VI800A-232U Components

- **U1 – SC16IS760**

This converts the SPI signals from the VM800P Plus board to UART TTL signals.

- **U4 – ZT3222F**

This converts the UART signals from the TTL level to RS232 level.

- **LED1 – LED4**

Indicates the status of GPIO inputs. Illuminate when the GPIO line is logic 0.

- **LED5 –LED8**

Indicates the status of the GPIO outputs. Illuminate when the GPIO line is logic 0.

4 Board Schematics

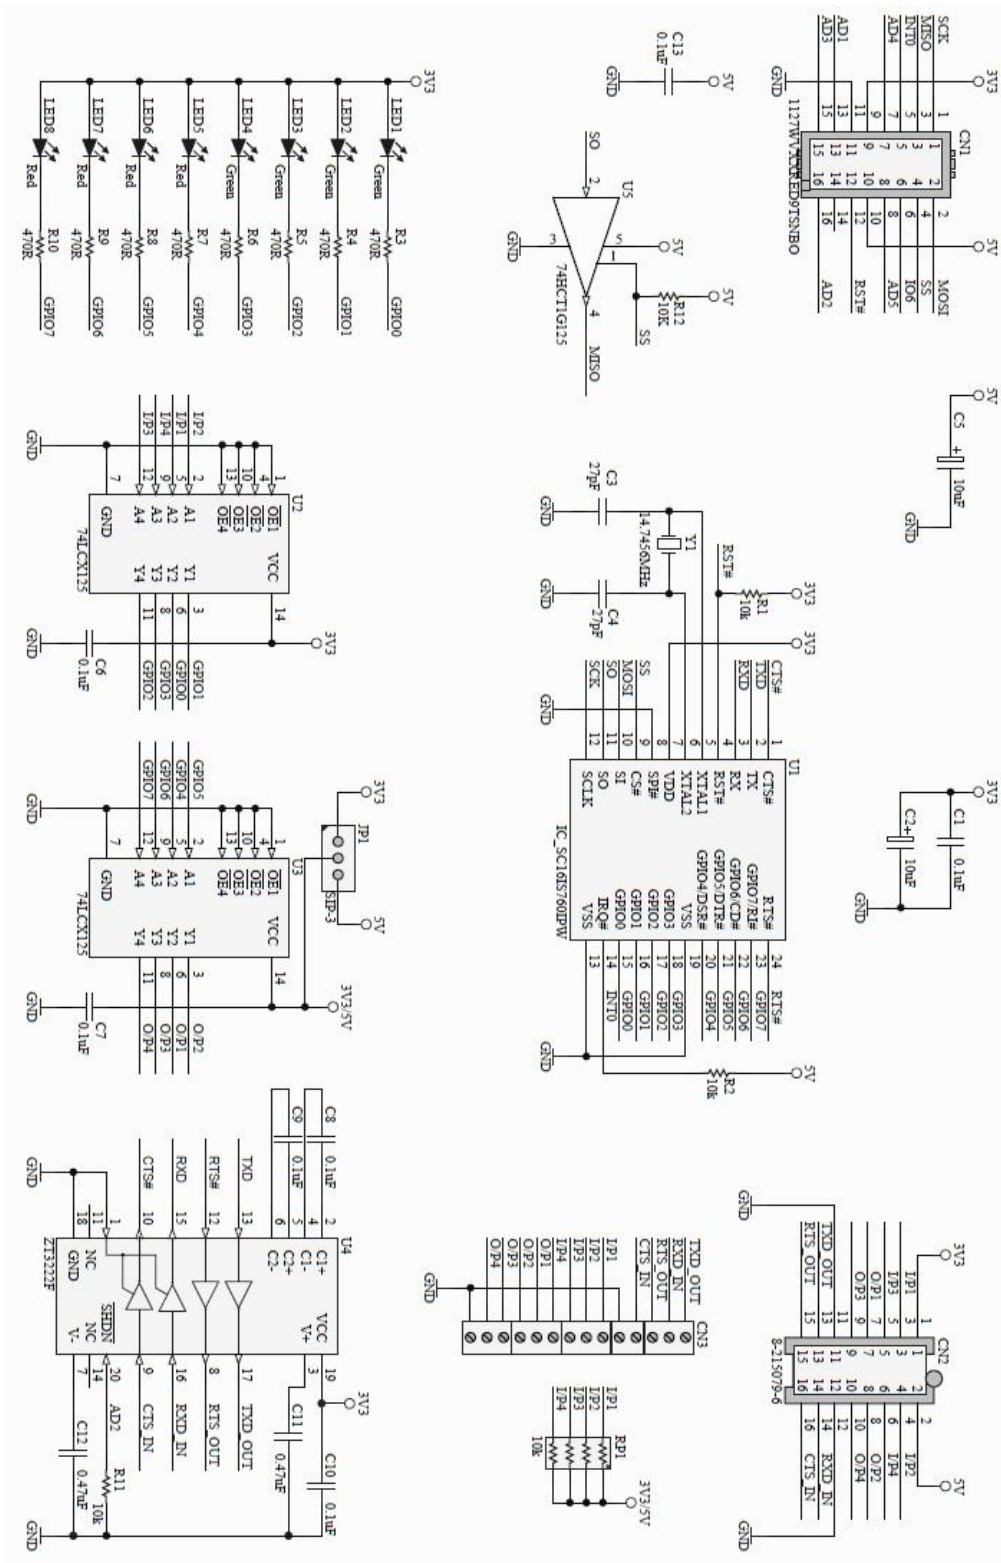


Figure 4-1 - VI800A-232U Schematics

5 Hardware Setup Guide

5.1 Power Configuration

The board is powered from the VM800P Plus board. The CN1 connector on the VI800A-232U board should be connected to the J6 connector of the VM800P plus board as shown in the Figure 5-1.

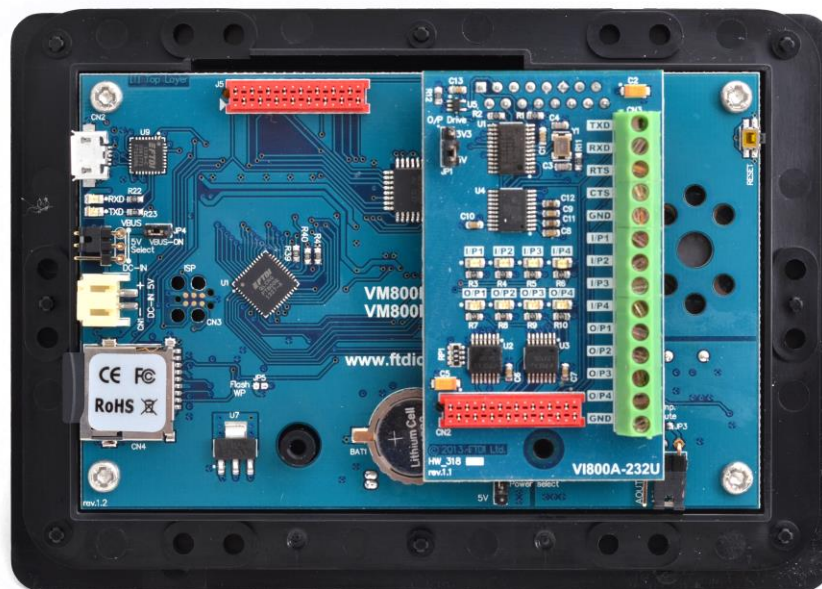


Figure 5-1 - VI800A-232U module connected to VM800P Plus module

5.2 RS232 Interface connection

The TXD_OUT signal on CN3 is connected to the RXD signal on the external RS232 device.

The RXD_IN signal on CN3 is connected to the TXD signal on the external RS232 device.

The RTS_OUT signal on CN3 is connected to the CTS signal on the external RS232 device.

The CTS_IN signal on CN3 is connected to the RTS signal on the external RS232 device.

The GND signal on CN3 is connected to the GND signal on the external RS232 device.

The output from the external device is connected to the inputs I/P1, I/P2, I/P3 and I/P4 on CN3.

The outputs O/P1, O/P2, O/P3 and O/P4 on CN3 are connected to the input of the external device.

The LEDs LED1 to LED8 are used to display the status of the inputs and outputs.

This interface is used to interface the VM800P Plus module to the devices having RS232 and GPIO interfaces.

6 Contact Information

Head Office – Glasgow, UK

Unit 1, 2 Seaward Place, Centurion Business Park
Glasgow G41 1HH
United Kingdom
Tel: +44 (0) 141 429 2777
Fax: +44 (0) 141 429 2758

E-mail (Sales) sales1@ftdichip.com
E-mail (Support) support1@ftdichip.com
E-mail (General Enquiries) admin1@ftdichip.com

Branch Office – Tigard, Oregon, USA

7130 SW Fir Loop
Tigard, OR 97223
USA
Tel: +1 (503) 547 0988
Fax: +1 (503) 547 0987

E-Mail (Sales) us.sales@ftdichip.com
E-Mail (Support) us.support@ftdichip.com
E-Mail (General Enquiries) us.admin@ftdichip.com

Branch Office – Taipei, Taiwan

2F, No. 516, Sec. 1, NeiHu Road
Taipei 114
Taiwan, R.O.C.
Tel: +886 (0) 2 8797 1330
Fax: +886 (0) 2 8751 9737

E-mail (Sales) tw.sales1@ftdichip.com
E-mail (Support) tw.support1@ftdichip.com
E-mail (General Enquiries) tw.admin1@ftdichip.com

Branch Office – Shanghai, China

Room 1103, No. 666 West Huaihai Road,
Changning District, Shanghai, 200052
China
Tel: +86 (0)21 6235 1596
Fax: +86 (0)21 6235 1595

E-mail (Sales) cn.sales@ftdichip.com
E-mail (Support) cn.support@ftdichip.com
E-mail (General Enquiries) cn.admin@ftdichip.com

Web Site

<http://www.ftdichip.com/>

Distributor and Sales Representatives

Please visit the Sales Network page of the [FTDI Web site](#) for the contact details of our distributor(s) and sales representative(s) in your country.

System and equipment manufacturers and designers are responsible to ensure that their systems, and any Future Technology Devices International Ltd (FTDI) devices incorporated in their systems, meet all applicable safety, regulatory and system-level performance requirements. All application-related information in this document (including application descriptions, suggested FTDI devices and other materials) is provided for reference only. While FTDI has taken care to assure it is accurate, this information is subject to customer confirmation, and FTDI disclaims all liability for system designs and for any applications assistance provided by FTDI. Use of FTDI devices in life support and/or safety applications is entirely at the user's risk, and the user agrees to defend, indemnify and hold harmless FTDI from any and all damages, claims, suits or expense resulting from such use. This document is subject to change without notice. No freedom to use patents or other intellectual property rights is implied by the publication of this document. Neither the whole nor any part of the information contained in, or the product described in this document, may be adapted or reproduced in any material or electronic form without the prior written consent of the copyright holder. Future Technology Devices International Ltd, Unit 1, 2 Seaward Place, Centurion Business Park, Glasgow G41 1HH, United Kingdom. Scotland Registered Company Number: SC136640

Appendix A – References

VM800P Datasheet: [VM800P Plus board](#)

FT800 datasheet: [FT800 Embedded Video Engine](#)

FT800 software programming guide: [FT800 Programmer Guide](#)

FT800 sample application notes:

[AN 246 VM800CB SampleAPP Arduino Introduction](#)

[AN 275 FT800 Example with Arduino](#)

[AN 318 Arduino Library for FT800 Series](#)

[AN 330 VI800A TTL 232U N485U ArduinoLibrary Sample](#)

Appendix B - List of Figures and Tables

List of Figures

Figure 3-1 – VI800A-232U module	4
Figure 3-2 - VI800A-232U module PCB Top view	5
Figure 3-3 - VI800A-232U module PCB Bottom view	5
Figure 3-4 - VI800A-232U module PCB Side view	6
Figure 4-1 - VI800A-232U Schematics	9
Figure 5-1 - VI800A-232U module connected to VM800P Plus module.....	10

List of Tables

Table 2-1 – Ordering information	2
Table 3-1 – CN1 Pinout.....	6
Table 3-2 – CN2 Pinout.....	7
Table 3-3 – CN3 Pinout.....	7
Table 3-4 – JP1 Pin options	8

Appendix C – Revision History

Document Title: DS_VI800A-232U
Document Reference No.: FT_000992
Clearance No.: FTDI#411
Product Page: <http://www.ftdichip.com/EVE.htm>
Document Feedback: [Send Feedback](#)

Version 1.0	Initial Datasheet released	14/10/14
Version 1.1	Added height dimensions	20/10/14