

# MIST-X

Create a healthier working environment

Parker domnick hunter MIST-X oil eliminator/exhaust silencers for pneumatic systems - the environmentally friendly and efficient solution to the following two problems:

**Oil/Mist Contamination:** Exhaust air from various pneumatic components, such as valves and cylinders generally contains a significant amount of oil mist, which pollutes the working environment.

**Noise Pollution:** Expanding exhaust air produces both sudden and excessive noise, at levels generally above accepted safety standards which makes the working environment both unpleasant and unsafe.

By using Parker domnick hunter MIST-X, oil mist is removed from the exhaust air and collected. This prevents contamination entering the atmosphere. Noise is also reduced to accepted safety standards. Thus creating a healthier working environment.



## Contact Information:

Parker Hannifin  
**domnick hunter North America Sales Company**  
North Carolina, USA  
Tel: (704) 921-9303  
Toll Free: 1-800-345-8462  
Fax: (704) 921-1960

**domnick hunter Canada**  
Ontario, Canada  
Tel: (905) 820-7146  
Toll Free: 1-888-342-2623  
Fax: (905) 820-5463

[www.domnickhunter.com](http://www.domnickhunter.com)

## Benefits:

- **Creates a healthier working environment**
- **Elimination of oil mist**
- **Reduces noise pollution**
- **Low cost solution**
- **Easy to install**



ENGINEERING YOUR SUCCESS.

## Technical Information

The MIST-X is disposable and should be changed when the back pressure becomes excessive for your particular application.

During operation, the MIST-X coalesces

oil mist which is then collected in an integral translucent oil container. The oil collected should be drained periodically by removing the drain cap or piped away using 1/4" (6 mm) plastic

tubing. The coalescing media is specifically designed to absorb the sudden shock of exhaust air. By allowing expansion to occur in a controlled manner, noise levels are greatly reduced.


## Technical Specifications

Model	cfm	Pipe	A		B		C		D		Weight	
			ins	mm	ins	mm	ins	mm	ins	mm	oz	g
MIST-X 25	53	1/2"	2.4	60	4.4	113	0.5	12	0.25	6.0	3.5	100
MIST-X 50	105	1"	2.4	60	6.3	161	0.5	12	0.25	6.0	5.0	140
MIST-X 150	315	1 1/2"	3.4	86	8.1	206	0.5	12	0.26	6.0	13.0	370

Typical operating temperature range:: 36°F - 122°F (2°C - 50°C)

Noise level reduction: Typically 25 dBA


## Typical Applications

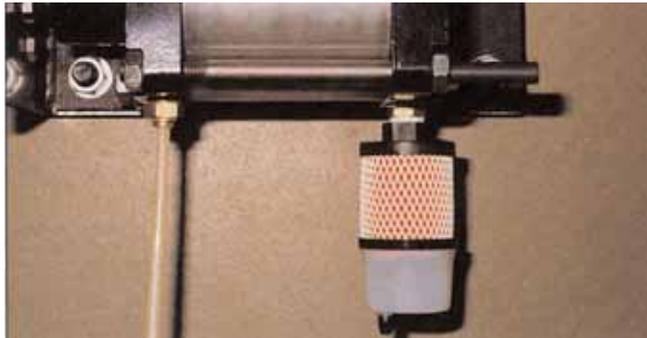

Air cylinders



Air motors



For more information on extended warranty and preventative maintenance contract availability, please contact your local Parker domnick hunter sales office or log on to [www.domnickhunter.com](http://www.domnickhunter.com).

©2009 Parker Hannifin Corporation. All rights reserved. Publication Reference: 05 07/03 Rev. 005 USA 11/04



ENGINEERING YOUR SUCCESS.