



SIRIUS MCU MOTOR STARTER EN. DEGR. OF PROTEC. IP55 PLASTIC COMMUNICATION WITHOUT ELECTROMECHANICAL SWITCHING SHORT-CIRCUIT PROTECTION W. CB REVERSING STARTER BRAKE WITHOUT PERFORMANCE CLASS 12A MOTOR PROTEC. CIRCUIT-BREAKER WITH BIMETAL-THERMAL ROTARY DRIVE RED / YELLOW MANUAL OPERATION WITHOUT CONNEX POWER M-SCREW CONNECTION STANDARD PRODUCT

General details:

Design of the product		reversing starter
Product function		
• bus-communication		No
• short circuit protection		Yes
Protocol / is supported		
• AS interface protocol		No
• PROFINET protocol		No
• PROFIBUS DP protocol		No
Product component / outlet for engine brake		No
Product equipment		
• brake control with 24 V DC		No
• brake control with 180 V DC		No
• brake control with 500 V DC		No
• brake control with 230 V AC		No
• brake control with 400 V AC		No
Product extension		
• braking module for brake control		No
Type of assignment		1
Width	mm	182

Height	mm	220
Depth	mm	145
Operating cycles / minimum	1/h	80
Item designation		
<ul style="list-style-type: none"> • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 		A
<ul style="list-style-type: none"> • according to DIN EN 61346-2 		Q

Control circuit:

type of voltage		AC
Control supply voltage		
<ul style="list-style-type: none"> • at 50 Hz / at AC / rated value / minimum 	V	184
<ul style="list-style-type: none"> • at 50 Hz / at AC / rated value / maximum 	V	253
<ul style="list-style-type: none"> • at 60 Hz / at AC / rated value / minimum 	V	196
<ul style="list-style-type: none"> • at 60 Hz / at AC / rated value / maximum 	V	253
Supply voltage frequency / for auxiliary and control current circuit		
<ul style="list-style-type: none"> • rated value 	Hz	50 ... 60
Number of digital inputs		2

Main circuit:

Design of the short-circuit protection		circuit-breakers
Type of the motor protection		bimetal
Design of the switching contact		electromechanical
Operating current / at 400 V / for AC / rated value	A	12
Operating voltage / rated value		
<ul style="list-style-type: none"> • minimum 	V	340
<ul style="list-style-type: none"> • maximum 	V	440
Service power		
<ul style="list-style-type: none"> • at AC-3 / at 400 V / rated value 	kW	5.5
<ul style="list-style-type: none"> • for three-phase servomotors / at 400 V / at 50 Hz / minimum 	kW	5.5
<ul style="list-style-type: none"> • for three-phase servomotors / at 400 V / at 50 Hz / maximum 	kW	5.5
Adjustable response current / of the current-dependent overload release		
<ul style="list-style-type: none"> • initial value 	A	9
<ul style="list-style-type: none"> • final value 	A	12.5
Breaking capacity limit short-circuit current (I_{cu}) / at 400 V / rated value	A	50,000
Number of poles / for main current circuit		3

Connection type:

Design of the electrical connection / for main current circuit		screw-type terminals
---	--	----------------------

Ambient conditions:

Protection class IP

IP55

Ambient temperature

- during operating

°C

-25 ... +35

Certificates/approvals:

General Product Approval



GOST

Declaration of Conformity



EG-Konf.

Test Certificates

[Type Test Certificates/Test Report](#)

other

[Confirmation](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK4353-3PR58-1BA0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK4353-3PR58-1BA0

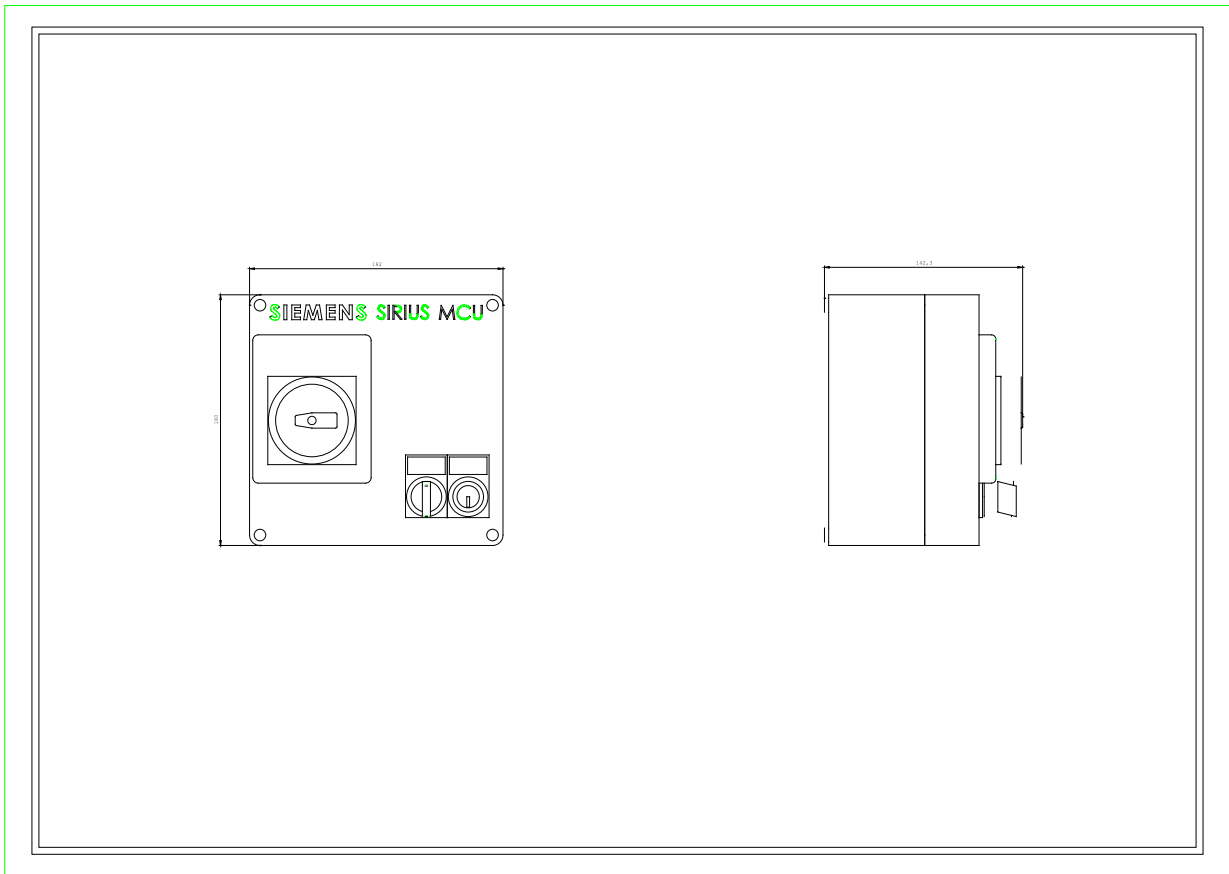

last change:

Aug 12, 2013